



LED Outdoor Wall Light Catalogue


Contents

Comet Series Triangle



GJCOM

Comet Series Round

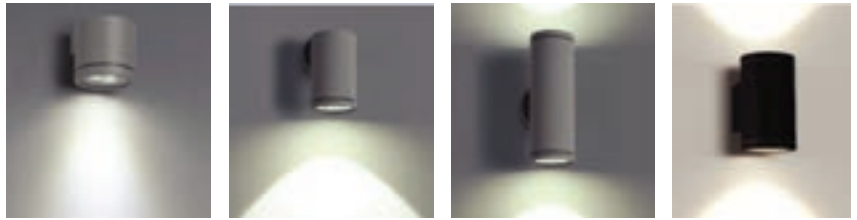

GJCOM

Comet Series Square



GJCOM

Sahara Series 10W



GLSAH-10W

Sole Series



GLSOL

Sahara Series 20W



GLSAH-20W

Allure Outdoor Series



GKALL


Eclipse Series





GMECL

Comet Series LED Wall Light Triangle

Down
6W


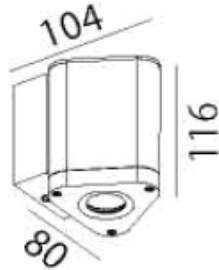


Up/Down
2*10W

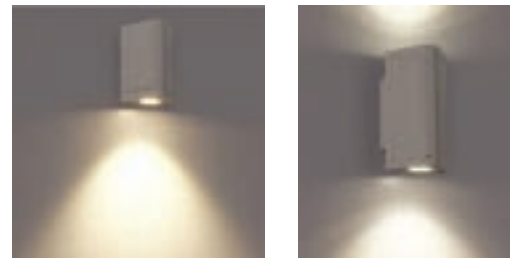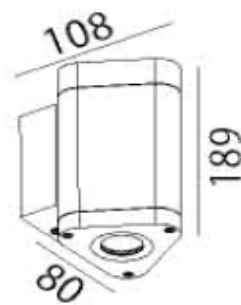




- Replaces traditional Outdoor Wall Lights
- Triac dimmer system for option
- High quality Die-casting Powder Coated Aluminium housing with Clear Diffuser
- High Lumen Output
- High Quality COB Chipset

- 30° ~ 55° Beam Angle
- CRI >82
- Housing Color options: Black/Silver
- IP65 Rated (Waterproof)
- 3 Years Warranty

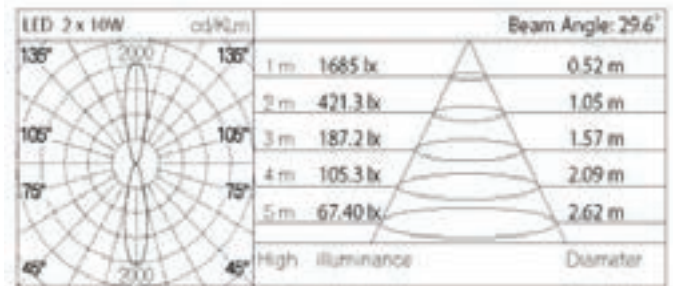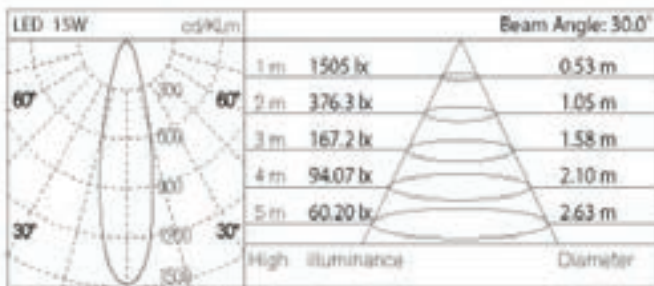

Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GJCOM-6W	80*104*116	IP65	30°/55°	3000-6000k	600	6W	COB	Triac
GJCOM-12W	80*108*189	IP65	30°/55°	3000-6000k	1200	2*6W	COB	Triac

Comet Series LED Wall Light Round

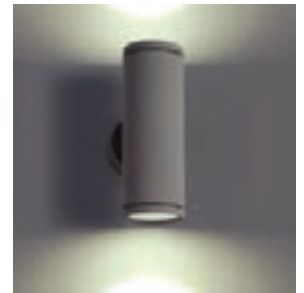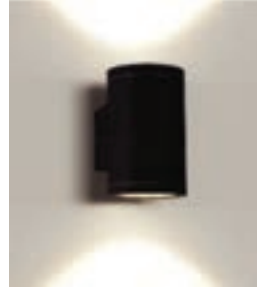
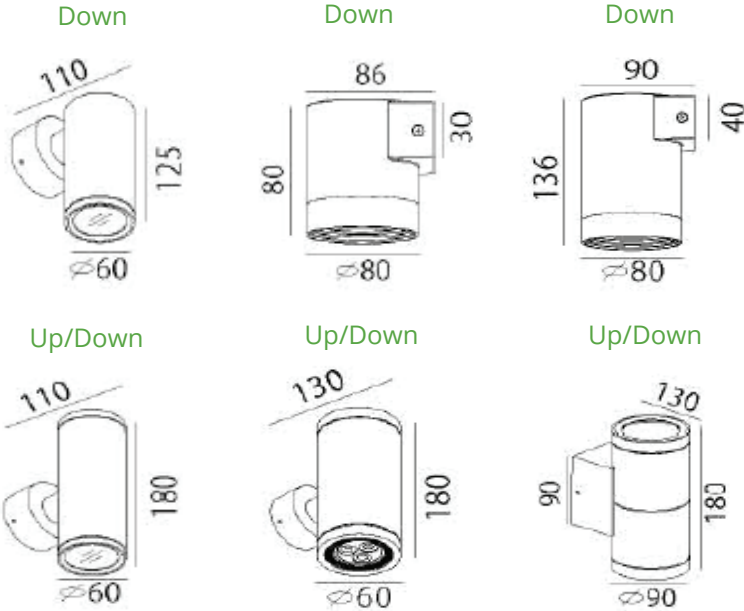


- Replaces traditional Outdoor Wall Lights
- Triac dimmer system for option
- High quality Die-casting Powder Coated Aluminium housing with Clear Diffuser
- High Lumen Output
- High Quality COB Chipset

- 30° ~ 55° Beam Angle
- CRI >82
- Housing Color options: Black/Silver
- IP54 & IP65 Rated (Waterproof)
- 3 Years Warranty

Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GJCOM-3W	60*110*125	IP54&IP65	30°/55°	3000-6000k	300	3W	SMD	Triac
GJCOM-3W	80*86*80	IP54&IP65	30°/55°	3000-6000k	300	3W	SMD	Triac
GJCOM-3W	80*90*136	IP54&IP65	30°/55°	3000-6000k	300	3W	SMD	Triac
GJCOM-6W	60*110*180	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac
GJCOM-6W	60*130*180	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac
GJCOM-20W	90*130*180	IP54&IP65	30°/55°	3000-6000k	2000	2*10W	COB	Triac

Comet Series LED Wall Light Square

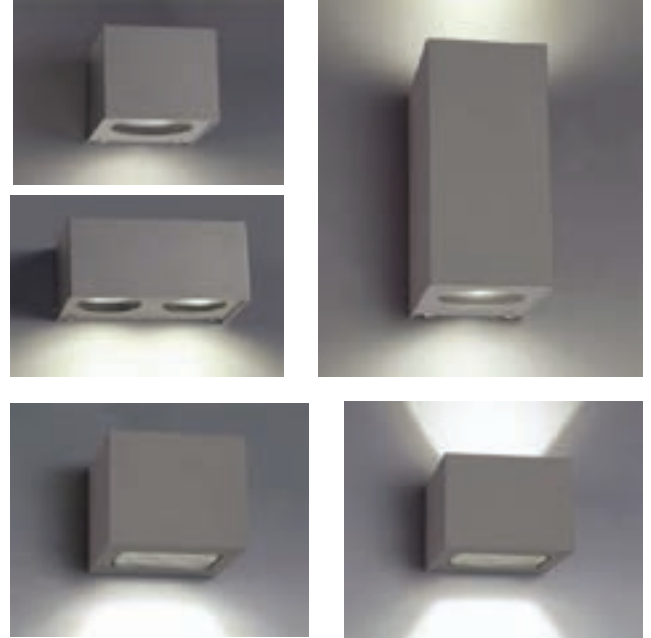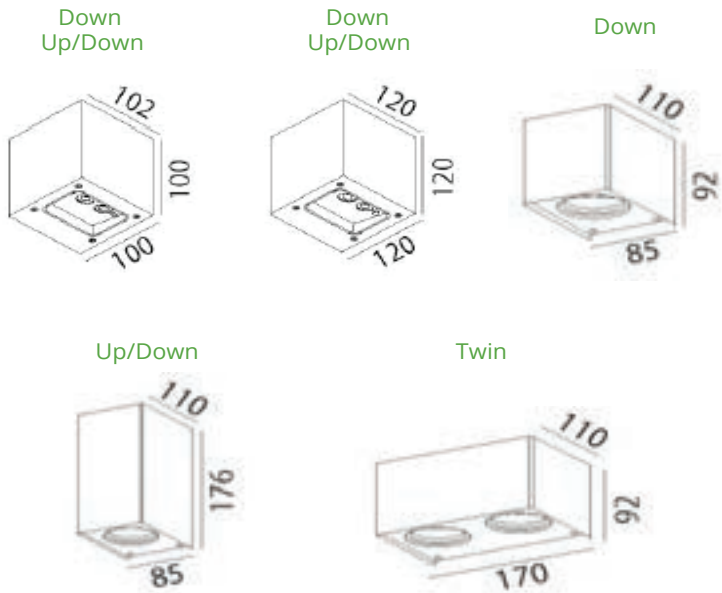


- Replaces traditional Outdoor Wall Lights
- Triac dimmer system for option
- High quality Die-casting Powder Coated Aluminium housing with Clear Diffuser
- High Lumen Output
- High Quality COB Chipset

- 30° ~ 55° Beam Angle
- CRI >82
- Housing Color options: Black/Silver
- P54 & IP65 Rated (Waterproof)
- 3 Years Warranty


Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GJCOM-3W	100*102*100	IP54&IP65	30°/55°	3000-6000k	300	3W	SMD	Triac
GJCOM-3W	85*110*92	IP54&IP65	30°/55°	3000-6000k	300	3W	SMD	Triac
GJCOM-5W	120*120*120	IP54&IP65	30°/55°	3000-6000k	500	5W	SMD	Triac
GJCOM-6W	100*102*100	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac
GJCOM-6W	85*110*176	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac
GJCOM-6W	120*120*120	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac
GJCTW-6W	170*110*92	IP54&IP65	30°/55°	3000-6000k	600	2*3W	SMD	Triac

Sahara Series LED Outdoor Wall Light 10W

Round


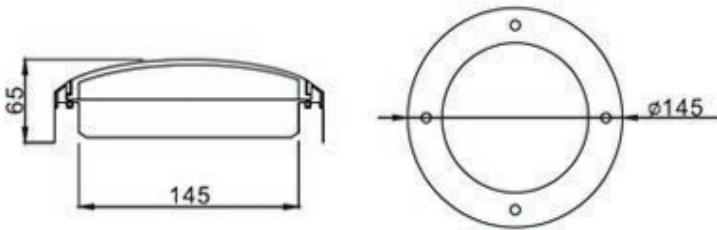


Oval

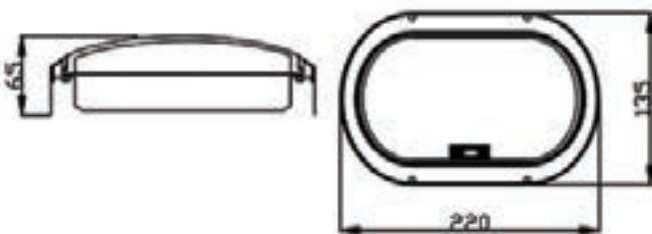

- Replaces traditional Outdoor Wall Lights
- Ceiling or wall mounted
- Available in oval and round shape
- High quality Aluminum base, excellent heat dissipation
- High quality PC housing, high impact resistance
- High Lumen Output 850lm
- High Quality 2835 SMD Chipset

- Input Voltage 100V ~ 240V AC
- 120° Beam Angle
- CRI >80
- Housing Color options: Black/White
- IP65 Rated (Waterproof)
- 3 Years Warranty

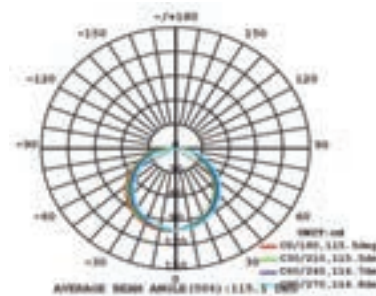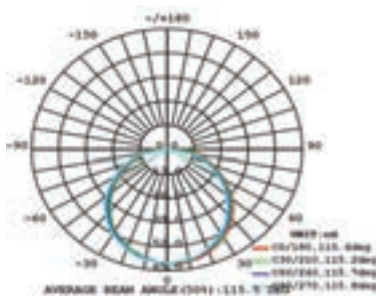

Model#	Dimension	Shape	Beam Angle	CCT	Lumens	Wattage	LED
GLSHA-10W-O	220*135*65	Oval	120°	3000-6000k	850	10W	2835 SMD
GLSHA-10W-R	145*145*65	Round	120°	3000-6000k	850	10W	2835 SMD

Sahara Series LED Outdoor Wall Light 20W




- Replaces traditional Outdoor Wall Lights
- Ceiling or wall mounted
- Available in oval and round shape
- High quality Aluminum base, excellent heat dissipation
- High quality PC housing, high impact resistance
- High Lumen Output 1600lm
- High Quality 2835 SMD Chipset

- Input Voltage 100V ~ 240V AC
- 120° Beam Angle
- CRI >80
- Housing Color options: Black/White
- IP65 Rated (Waterproof)
- 3 Years Warranty


Model#	Dimension	Shape	Beam Angle	CCT	Lumens	Wattage	LED
GLSHA-20W-R	270*270*80	Round	120°	3000-6000k	1600	20W	2835 SMD
GLSHA-20W-O	300*300*80	Oval	120°	3000-6000k	1600	20W	2835 SMD
GLSHA-20W-HM	220*135*65	Half Moon	120°	3000-6000k	1600	20W	2835 SMD
GLSHA-20W-HO	280*180*83	Half Oval	120°	3000-6000k	1600	20W	2835 SMD
GLSHA-20W-RE	275*180*75	Rectangle	120°	3000-6000k	1600	20W	2835 SMD
GLSHA-20W-T	250*125*110	Triangle	120°	3000-6000k	1600	20W	2835 SMD

Sole Series LED Outdoor Wall Light 20W

Round

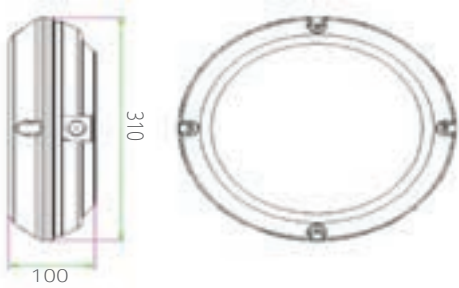


Square

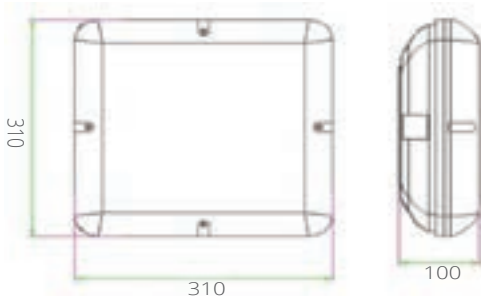


- Replaces traditional Outdoor Wall Lights
- Ceiling or wall mounted
- Available in oval and round shape
- High quality Aluminum base, excellent heat dissipation
- High quality PC housing, high impact resistance
- High Lumen Output 1600lm
- High Quality 2835 SMD Chipset

- Input Voltage 100V ~ 240V AC
- 120° Beam Angle
- CRI >80
- Housing Color options: Black/White
- IP65 Rated (Waterproof)
- 3 Years Warranty

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM-20W

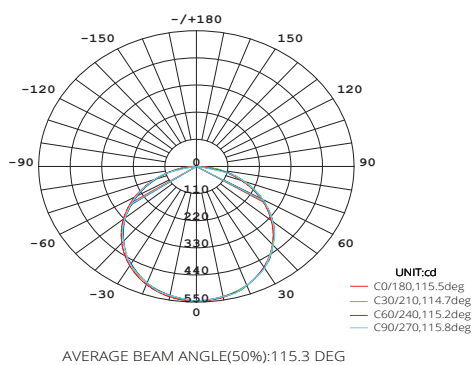


C0 PLANE ISOLUX DIAGRAM-20W (UNIT:lx)

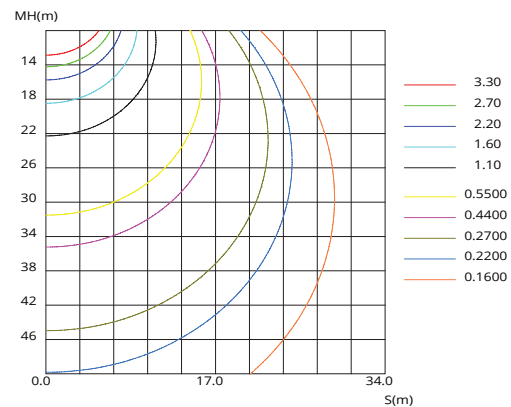

Model#	Dimension	Function	Beam Angle	CCT	Lumens	Wattage	LED
GLSOL-20W	310*310*100	Common	120°	3000-6000k	1900~2100	20W	2835 SMD
GLSOL-20W-S	310*310*100	On/Off Sensor	120°	3000-6000k	1900~2100	20W	2835 SMD

Allure Series LED Outdoor Wall Light

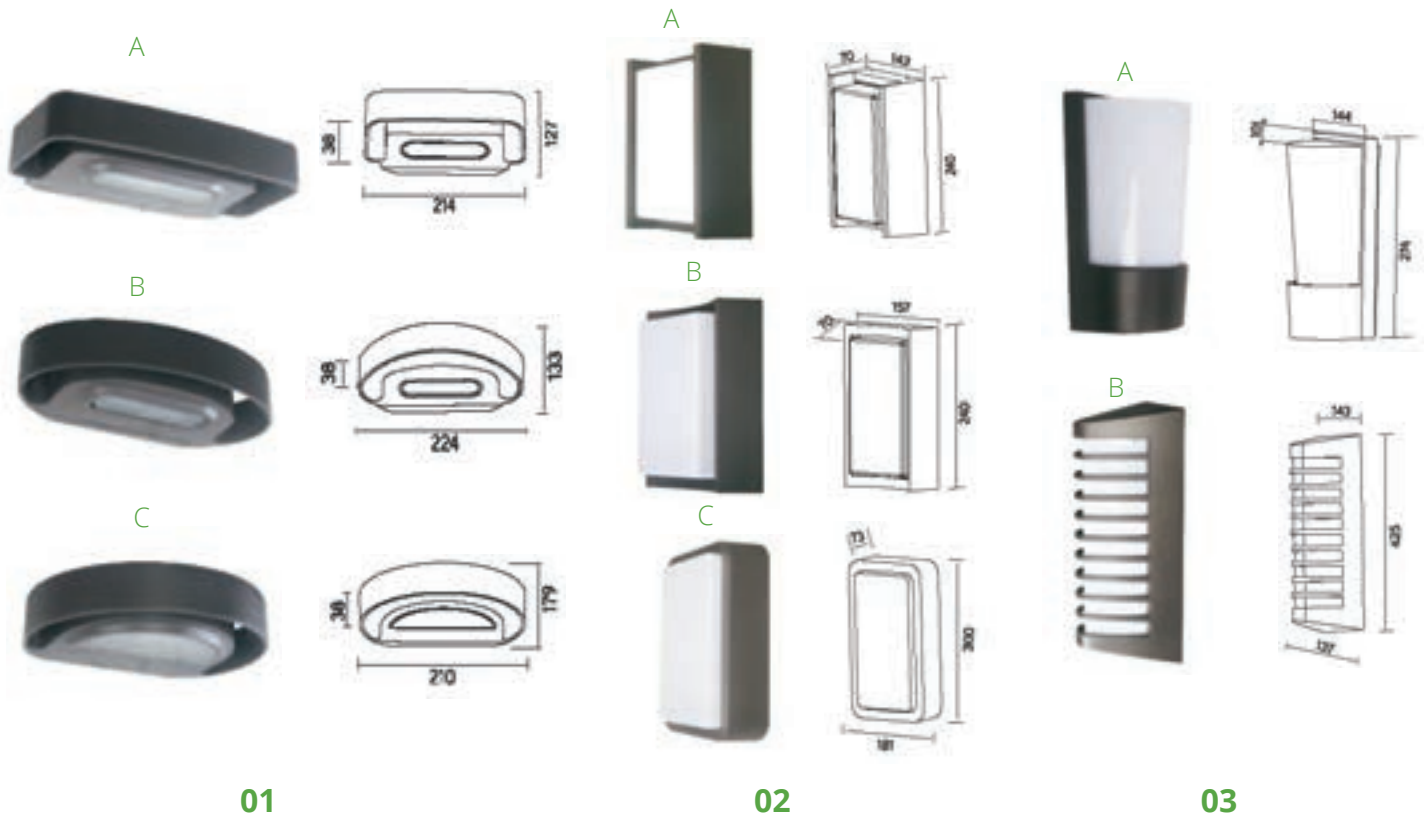


- Replaces traditional Outdoor Wall Lights
- High quality Aluminium Housing with Opal Diffuser
- High Lumen Output 95lm/W
- High Quality SMD Chipset
- Input Voltage 100V ~ 240V AC

- 60° ~ 120° Beam Angle
- CRI >80
- Housing Color options: Black
- IP44 & IP65 Rated (sheltered & waterproof)
- 3 Years Warranty



Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED
GKALL-8W-01-A	214*127*38	IP44&IP65	60°	3000-6000k	760	8W	SMD
GKALL-8W-01-B	224*133*38	IP44&IP65	60°	3000-6000k	760	8W	SMD
GKALL-10W-01-C	210*179*38	IP44&IP65	60°	3000-6000k	950	10W	SMD
GKALL-10W-02-A	240*143*70	IP44&IP65	120°	3000-6000k	950	10W	SMD
GKALL-10W-02-B	240*157*70	IP44&IP65	120°	3000-6000k	950	10W	SMD
GKALL-18W-02-C	300*181*73	IP44&IP65	120°	3000-6000k	1710	18W	SMD
GKALL-10W-03-A	274*144*10	IP44&IP65	120°	3000-6000k	950	10W	SMD
GKALL-18W-03-B	425*143*137	IP44&IP65	120°	3000-6000k	1710	18W	SMD

Eclipse Series 01 Outdoor LED Wallpack Light

30 ~ 60W

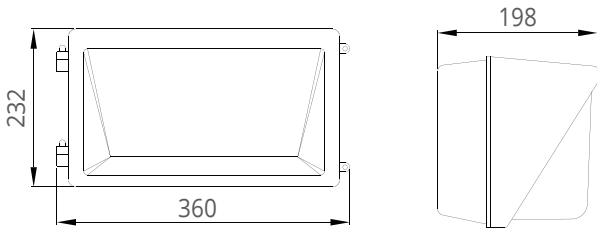


80 ~ 100W

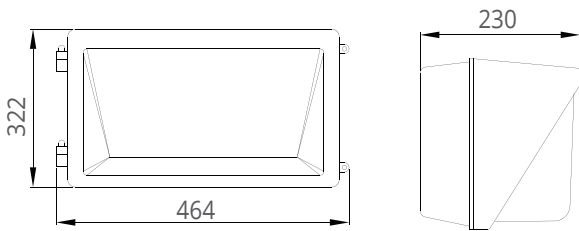




- Instant start, no noise, no flicker, anti-glare
- Die cast aluminum housing sealed with gasket
- Powder coated housing to prevent discoloration
- Shock & Vibration resistance
- High Lumen Output 95~105lm/W
- High Quality Philips Lumileds, Bridgelux or Cree Chipset

- Mean Well or Phillips Driver
- 120° Beam Angle
- CRI >70
- Housing Color options: Black
- IP65 Rated (Waterproof)
- 5 Years Warranty

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


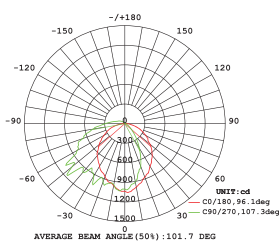


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

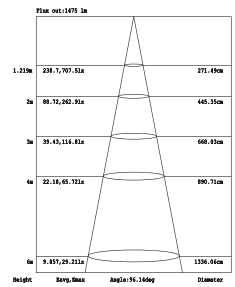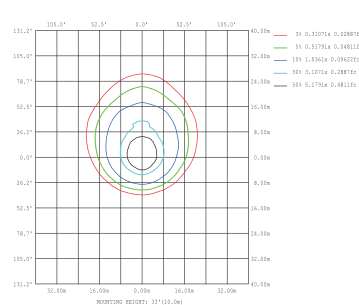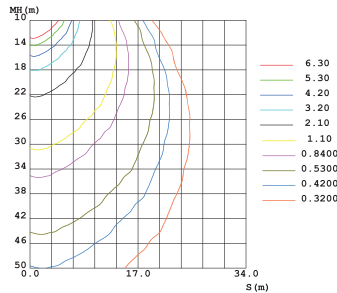

Model#	Length (mm)	Beam Angle	CCT	Lumens	Wattage	LED
GMECL-30W-WP01	360*232*198	120°	3000-6500k	3150	30W	Philips Lumileds, Bridgelux or Cree
GMECL-40W-WP01	360*232*198	120°	3000-6500k	4200	40W	Philips Lumileds, Bridgelux or Cree
GMECL-60W-WP01	360*232*198	120°	3000-6500k	6300	60W	Philips Lumileds, Bridgelux or Cree
GMECL-80W-WP01	464*322*230	120°	3000-6500k	8400	80W	Philips Lumileds, Bridgelux or Cree
GMECL-100W-WP01	464*322*230	120°	3000-6500k	10500	100W	Philips Lumileds, Bridgelux or Cree


Eclipse Series 02 Outdoor LED Wallpack Light

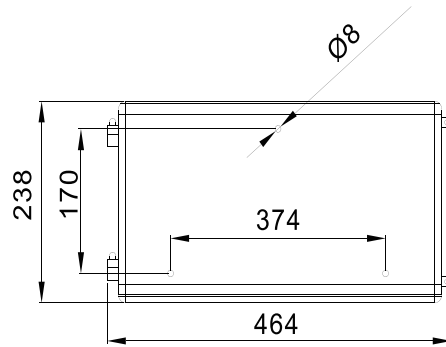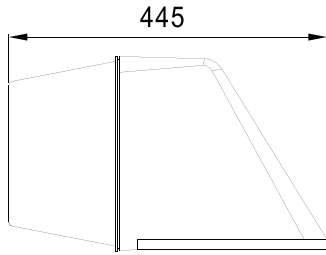




- Instant start, no noise, no flicker, anti-glare
- Die cast aluminum housing sealed with gasket
- Powder coated housing to prevent discoloration
- Shock & Vibration resistance
- High Lumen Output 105lm/W
- High Quality Philips Lumileds, Bridgelux or Cree Chipset

- Mean Well or Phillips Driver
- 120° Beam Angle
- CRI >70
- Housing Color options: Black
- IP65 Rated (Waterproof)
- 5 Years Warranty

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

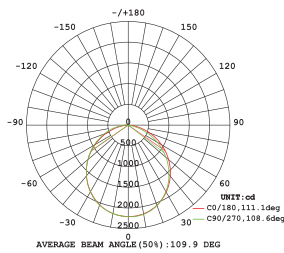


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

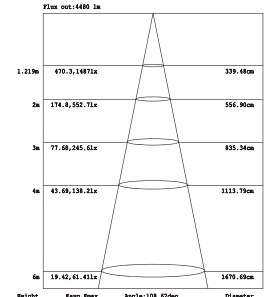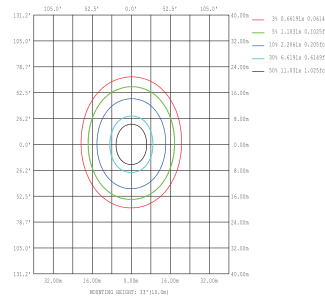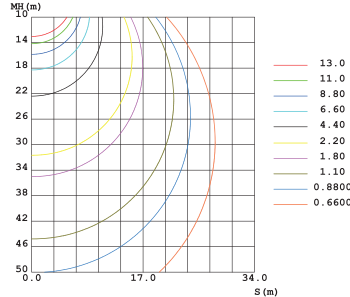

Model#	Length (mm)	Beam Angle	CCT	Lumens	Wattage	LED
GMECL-60W-WP02	464*445*238	120°	3000-6500k	6300	60W	Philips Lumileds, Bridgelux or Cree
GMECL-80W-WP02	464*445*238	120°	3000-6500k	8400	80W	Philips Lumileds, Bridgelux or Cree
GMECL-100W-WP02	464*445*238	120°	3000-6500k	10500	100W	Philips Lumileds, Bridgelux or Cree
GMECL-120W-WP02	464*445*238	120°	3000-6500k	12600	120W	Philips Lumileds, Bridgelux or Cree



Eclipse Series 03 Outdoor LED Wallpack Light

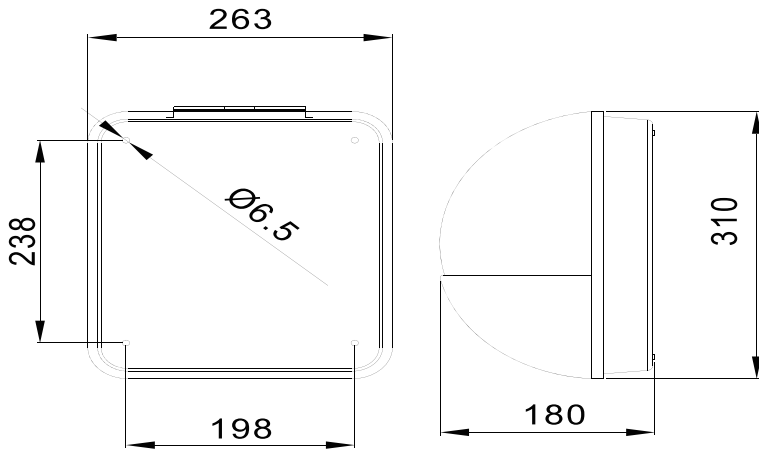



- Instant start, no noise, no flicker, anti-glare
- Die cast aluminum housing sealed with gasket
- Powder coated housing to prevent discoloration
- Shock & Vibration resistance
- High Lumen Output 95~105lm/W
- High Quality Philips Lumileds, Bridgelux or Cree Chipset

- Class II SAA Driver
- 120° Beam Angle
- CRI >70
- Housing Color options: Black
- IP65 Rated (Waterproof)
- 5 Years Warranty

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

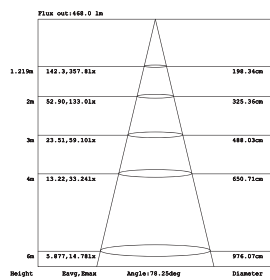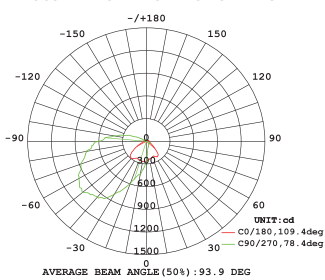

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

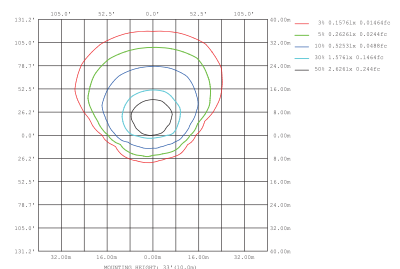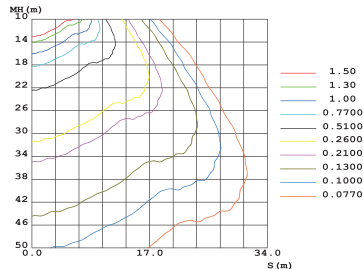

Model#	Length (mm)	Beam Angle	CCT	Lumens	Wattage	LED
GMECL-20W-WP03	310*263*180	120°	3000-6500k	2000	20W	Philips Lumileds, Bridgelux or Cree
GMECL-30W-WP03	310*263*180	120°	3000-6500k	3000	30W	Philips Lumileds, Bridgelux or Cree



LED Outdoor Wall Light Catalogue

GREENLUX

YOUR COST REDUCTION PARTNER

GREENLUX LED LIGHTING has been delivering quality lighting outcomes successfully to commercial sites nationally for the past 9 years. The parent company Innovative Digital Displays Pty Ltd has been trading for over 28 years. We have substantial experience in the manufacture and development of quality commercial LED lighting products. We have our own manufacturing facilities which mean we can deliver high quality product at extremely competitive pricing.



CONTACT US

www.greenlux.com.au
sales@greenlux.com.au
info@greenlux.com.au

MELBOURNE

9/331 Ingles Street, Port Melbourne
VIC 3207 Australia
T 1300 650 625 or +61 3 9646 8331

SYDNEY

Unit 1, 6-8 George Place Artarmon
NSW 2064 Australia
T 1300 650 625

QUEENSLAND

Unit 1, 16 Millaroo Dr Helensvale
Qld, 4212 Australia
T 1300 650 625