



greenlux
cost reduction LED lighting

Tempest Linear Series LED Batten Fixture

Available in Common, Sensor, Emergency, Sensor & Emergency



Replaceable LED strips
Easy Maintenance

- Available in Common, Sensor, Emergency and Emergency/Sensor
- Low-profile, light weight
- Excellent heat dissipation and superior lighting effect
- Replaceable LED strips with press terminal block for easy maintenance
- 6mm wiring block
- Non-breakable and non-discolor PC lens
- Ceiling, wall mounted or suspended Installation
- High light output 1000 ~ 13500lm
- High quality LED Chipset SMD 2835
- Non-discoloring opal polycarbonate diffuser for soft and even light output
- IP20 Rated
- 5 Years Warranty
- Applications include stairwells, parking areas, schools, corridors, storage rooms etc.

Dimensions

	(LxWxH)	
Product Dimensions (mm)	2Ft	613*111*78
	4Ft	1223*111*78
	5Ft	1511*111*78
Housing Materials	Cold Rolled Steel Housing + Aluminum Heatsink	
Lens	PC Diffuser	
Housing Colour	White	





greenlux
cost reduction LED lighting

Tempest Linear Series LED Batten Fixture



Specifications

Colour Range	3000-6000k
Power Consumption	10W ~ 120W
Lumens	1000 ~ 13500lm
Chipset	Epistar SMD 2835
Input Voltage	100-277V AC
Beam angle	110°
Ra	>83
PF	>0.95
Dimmer	0-10V (option)
Sensor	Microwave Motion (option)
Emergency	90 minutes (option)
Mounting Height	8m Max.
Driver	Class II SAA

Microwave Sensor

Sensor Range	16m * 8m (D * H) Max.
Sensing Interval	5s to 5min max (adjustable)
Sensing interval output	10% light output at standby (adjustable)
Detection Angle	150° Wall Installation 360° Ceiling Installation

Emergency


Type	Maintained
Battery (High Temp)	9.6V 3.2AH Ni-MH Rechargeable
Emergency Output	30% nominal power
Emergency Duration	>90 Minutes
Charge Time	<12 Hours





greenlux
cost reduction LED lighting

Tempest Linear Series LED Batten Fixture

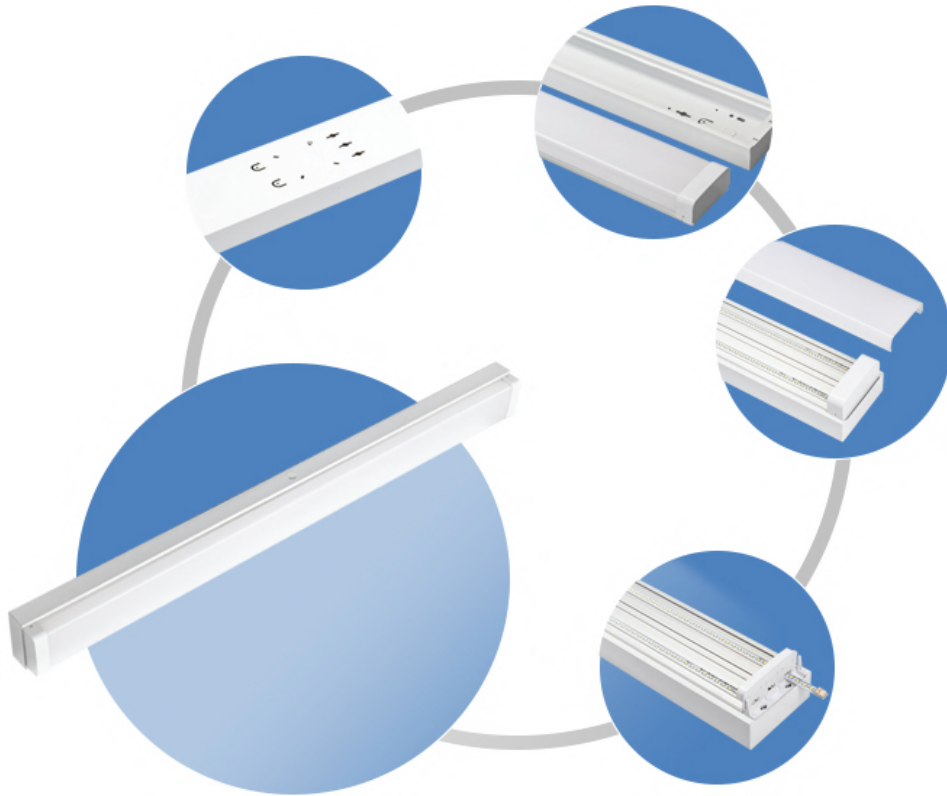

Model#	Dimensions	Lumen Output (lm)	Chipset	Rated Power (W)	Dimming (option)
GOTEP-10W-LI2F	613 * 111 * 78	1200	SMD	10W	0-10V
GOTEP-20W-LI4F	1223 * 111 * 78	2200	SMD	20W	0-10V
GOTEP-40W-LI4F	1223 * 111 * 78	4400	SMD	40W	0-10V
GOTEP-60W-LI4F	1223 * 111 * 78	6400	SMD	60W	0-10V
GOTEP-80W-LI4F	1223 * 111 * 78	9200	SMD	80W	0-10V
GOTEP-90W-LI4F	1223 * 111 * 78	10800	SMD	90W	0-10V
GOTEP-50W-LI5F	1511 * 111 * 78	6000	SMD	50W	0-10V
GOTEP-60W-LI5F	1511 * 111 * 78	6300	SMD	60W	0-10V
GOTEP-100W-LI5F	1511 * 111 * 78	11200	SMD	100W	0-10V
GOTEP-120W-LI5F	1511 * 111 * 78	13500	SMD	120W	0-10V