


# Chain GAS35 D3000

LED Curve & Round Linear Downward Light




## Features

- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Various installation ways: pendant, recessed and surface mounted

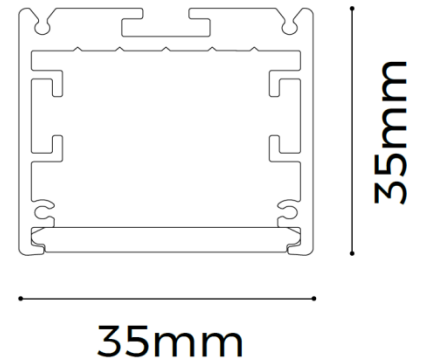

## Details

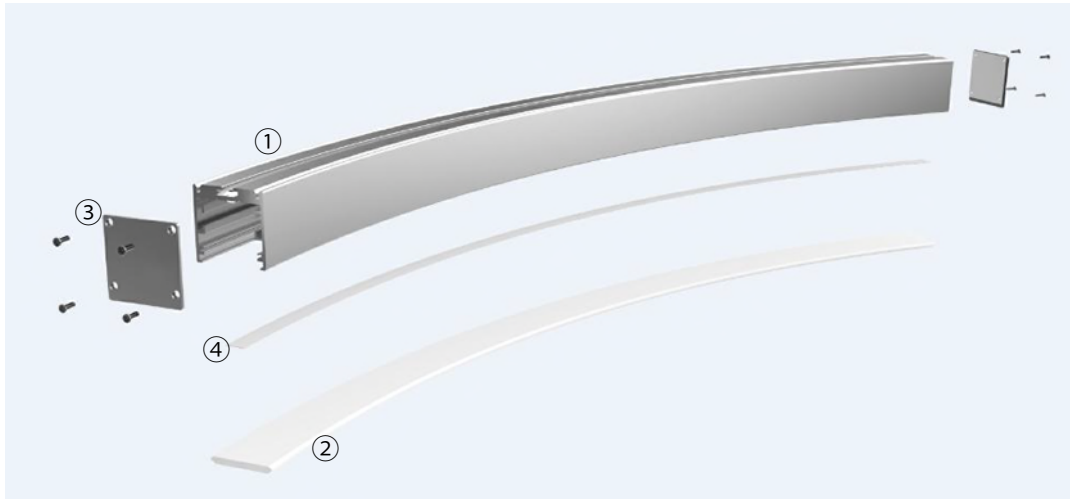

## Optional Accessories

### ① Profile:

Installation :Pendant/Recessed/Surface mounted

Material : AL6063-T5

Applications: Indoors

Profile weight : 0.95kg/ D3000mm, 45°

Size : 1192x35x35mm, 45° x 8, D3000mm

Surface processing: Spray



### ② Diffuser

L20000mm

Diffuser



### ③ End cap

35\*35\*1.5mm

AL6061



### ④ Rigid modular GCDY8140-24V-20mm-30A45

DC24V 11.6W/pcs width 20mm Min. cutting unit 100mm



### Screw set

M3.5\*40mm









Carbon steel



### Power supply


ESD-V24-100S

390\*38\*28.5mm

	Pendant cable with junction box	Steel cable D1.5*2000/4000mm	Junction box L80*W80*H30mm
	Pendant cable without junction box	Steel cable D1.5*2000/4000mm	
	straight fixed plate	L55*W10*H2mm	SPCC
	AS35-LN fixed plate	L55*W10*H2mm	SPCC Straight&arc interconnection
	AS35-N fixed plate	L55*W10*H2mm	SPCC Inner arc interconnection
	AS35-X fixed plate	L55*W10*H2mm	SPCC
	Headless inner hexagon screw	M5*4mm	
	Flat-head inner hexagon screw	CM5*4mm	

## Optical Parameter

Rigid LED Strip Modular & Frosted Diffuser

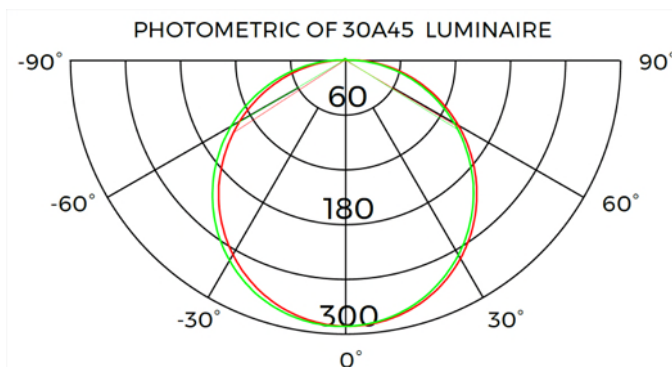

Height	Eavg,Emax	Angle:116.16deg	Diameter
1m	75.15,289.2lx		321.06cm
2m	18.79,72.31lx		642.11cm
3m	8.350,32.14lx		963.17cm
5m	3.006,11.57lx		1605.29cm
7m	1.534,5.903lx		2247.40cm