



# Chain GAS35 D835

LED Linear Downward Light




**greenlux**  
cost reduction LED lighting

# Chain GAS35 D835

## LED Linear **Downward** Light

GREENLUX CURVE LIGHTING WITH LIMITLESSNESS - GAS35 stylish lighting system, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand -new revolutionary experience. The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres.

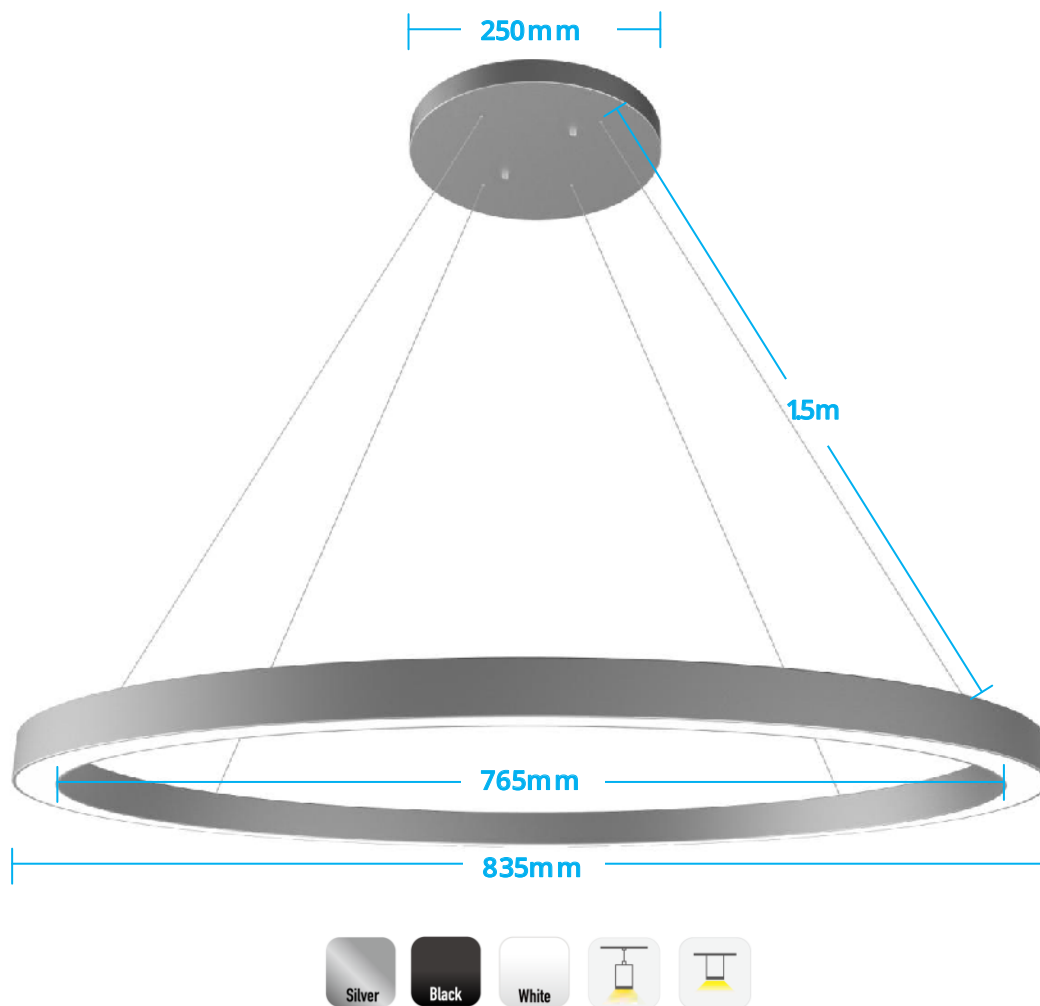

- $\Phi$  0.8M, circular luminaires of lighting downward;
- High quality surface treatment, three optional colors of black, white and silver;
- Adopt silicone flexible diffuser, producing homogenous & soft lighting;
- Pendant cable and wire in one, beautiful overall effect;
- Two installation ways: pendant and surface mounted.

# Chain GAS35 D835

## LED Linear Downward Light


### Optical & electronic data

Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)
GCCHA-GAS35-D835-50W (including power supply)	Φ800mm, lighting downward, 360° luminaires	1900K	1190LM	>80 >90	120°	100~265VAC 50/60Hz	Non-dimmable Dimmable (options)	>0.9	50W
		2300K	1250LM						
		2700K	1320LM						
		3000K	1390LM						
		3500K	1460LM						
		4000K	1540LM						
		5000K	1620LM						
GCCHA-GAS35-D835-43W (no power supply)	Φ800mm, lighting downward, 360° luminaires	1900K	1190LM	>80 >90	120°	DC24V	/	/	43W
		2300K	1250LM						
		2700K	1320LM						
		3000K	1390LM						
		3500K	1460LM						
		4000K	1540LM						
		5000K	1620LM						
6000K	1540LM								


Remark :

1. the tolerance of output data can be vary up to 10%;
2. the output data is typical value;

Luminaire of 0.8m diameter and lighting downward matched with flexible diffuser

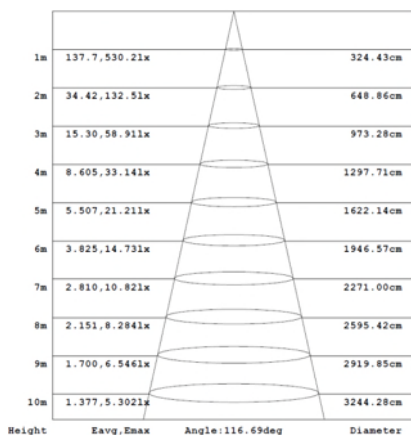

AAI FIGURE

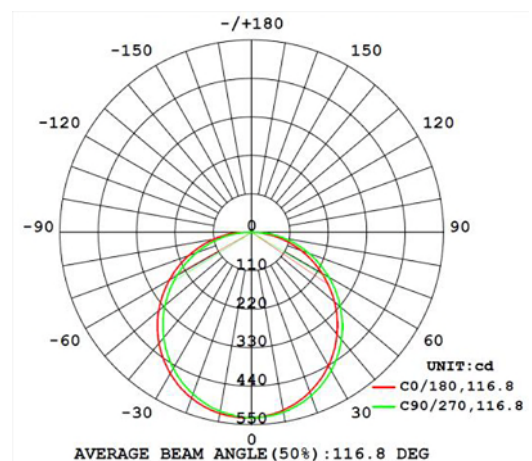


Luminous intensity distribution

# Chain GAS35 D835

## LED Linear Downward Light

### Packing

The whole package

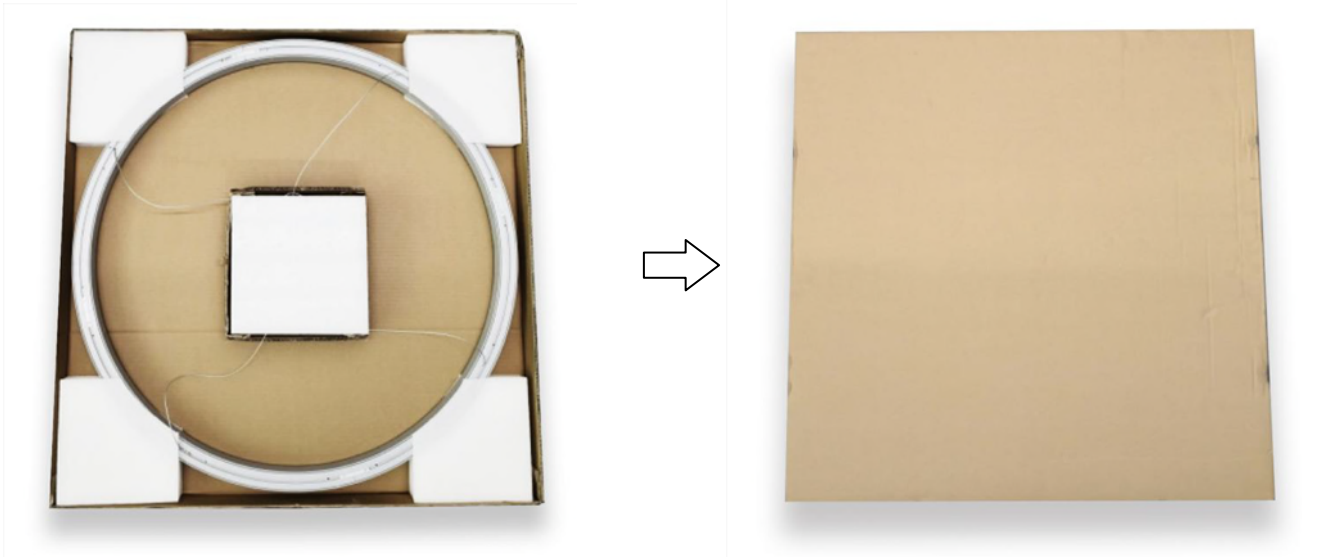

Model	Type	Demension (individual package )	Pcs/bundle	NW (Kg)	GW (Kg)	Demension (whole package )	CBM (m³)
GCCHA-GAS35-D835-50W ( pendant / including power supply)	Box	912*912*60mm	1	3.3	4.7	912*912*60mm	0.05
GCCHA-GAS35-D835-43W ( pendant / no power supply)				3.09	4.49		
GCCHA-GAS35-D835-50W ( surface mounted / including power supply)				2.26	3.66		
GCCHA-GAS35-D835-43W ( surface mounted / no power supply)				2.05	3.45		