

# Chain F

GLSF5164




**greenlux**  
cost reduction LED lighting

# Chain F LED Linear Light GLSF5164



GLSF5164 adopts modernism design style, simple and stylish, with stable quality and high luminous efficiency, exquisite & durable and good heat dissipation.

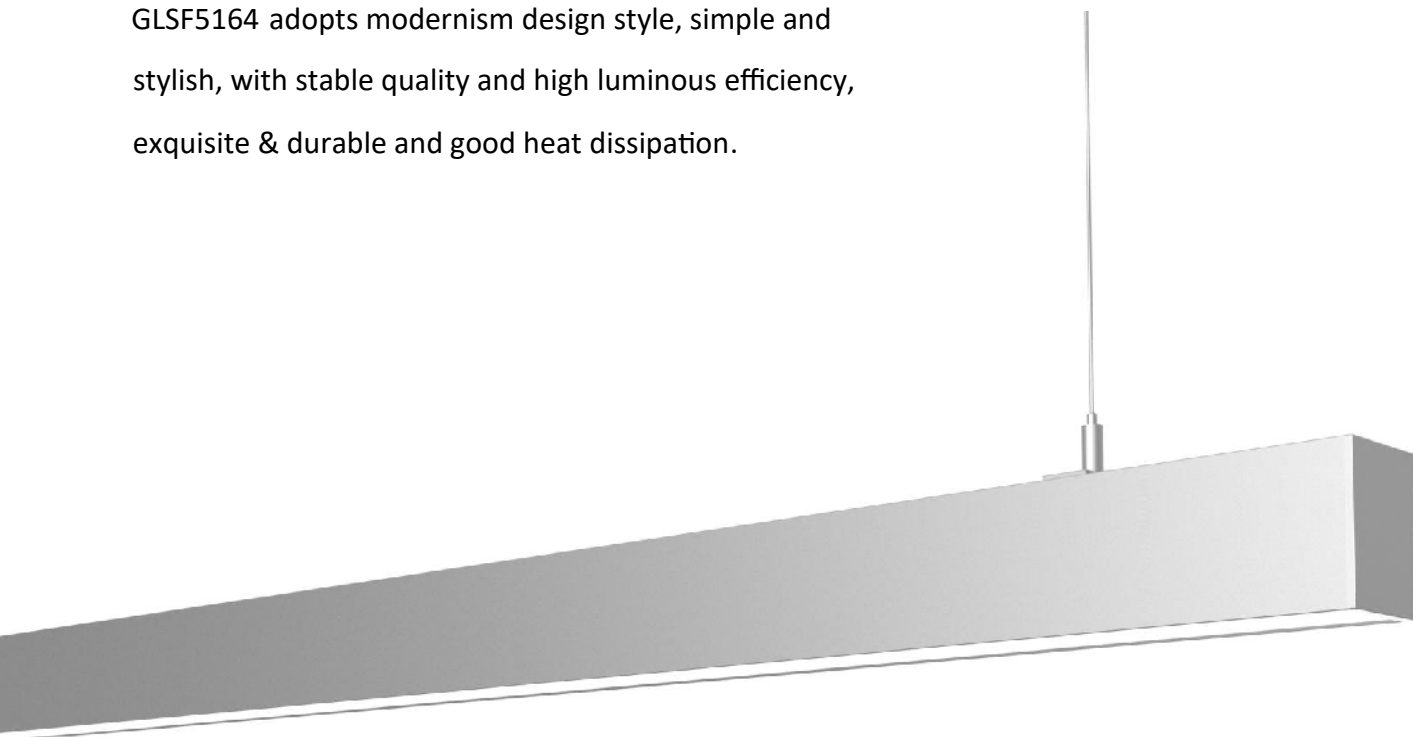


AL6063-T5 aluminum profile with high-quality surface treatment;

Three optional colors of black, white and silver;

LM80 certified light source, life >50000H;

Built-in efficient and safe flicker-free dimming power supply;

Multiple light distributions, select freely, flexible application.

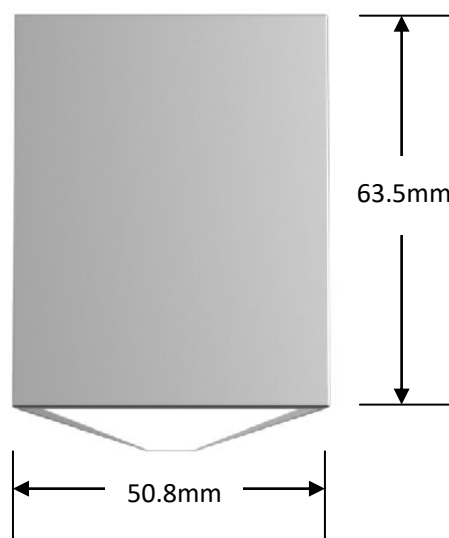

# Chain F LED Linear Light GLSF5164

Optical & electronic data :


Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)	Efficiency (lm/w)
GLSF5164-26W-4F	1152mm	3000K	2850LM	>80	105°	100~277VAC 50/60Hz	0-10V	>0.9	26W	110
		4000K	3000LM							115
GLSF5164-38W-6F	1727mm	3000K	3990LM	>80	105°	100~277VAC 50/60Hz	0-10V	>0.9	38W	105
		4000K	4200LM							111
GLSF5164-56W-8F	2507mm	3000K	5700LM	>80	105°	100~277VAC 50/60Hz	0-10V	>0.9	56W	102
		4000K	6000LM							107

Remark :

- 1、 the output data is based on the testing result of 1.2m luminaires
- 2、 the tolerance of output data can be vary up to 10% ;
- 3、 the output data is typical value;

## 1.2m luminaire with diffuser

AAI Figure

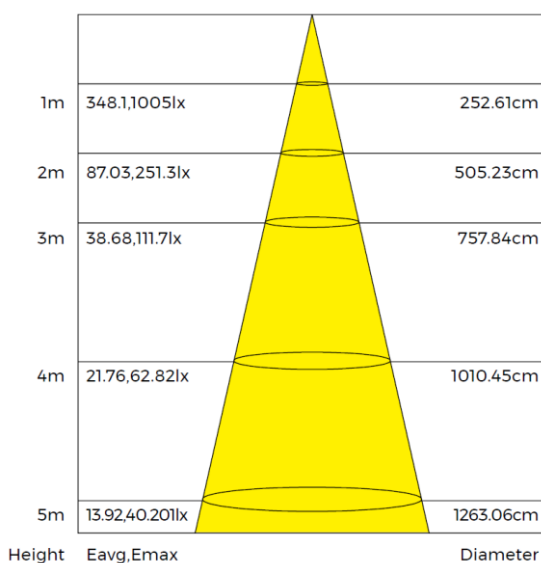

Luminous intensity distribution diagram

