


Chain GLS35 Series




GLS35DP



GLS35 as professional luminaire, integrates with beautiful structure design, creative optical & thermal design, new material and intelligent control, can widely used for indoor general lighting.

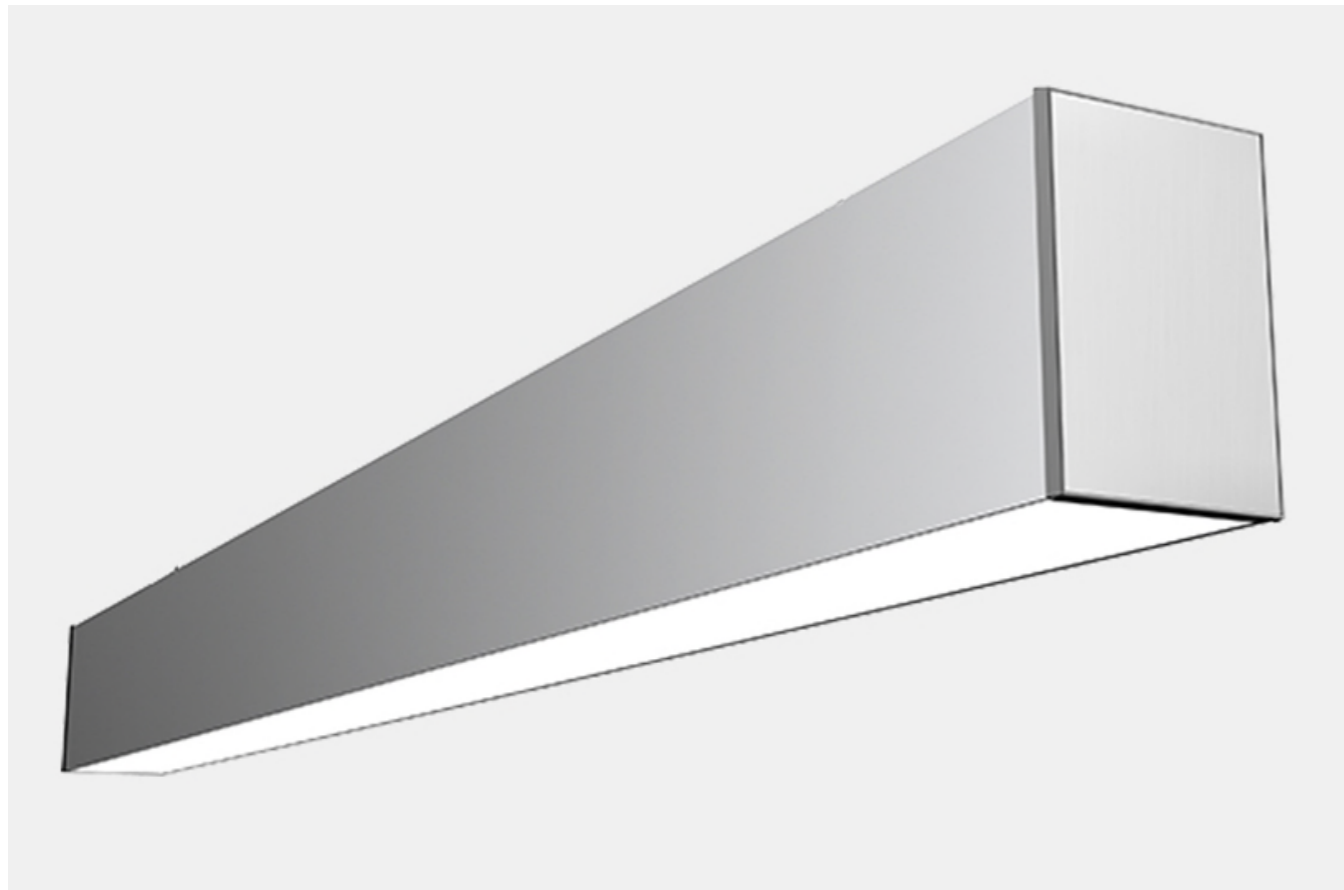


- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Anti-glare design UGR<19
- LM80 certified light source, life >50000H
- Built-in efficient and safe flicker-free dimming power supply
- Support 0~10V, Bluetooth dimming

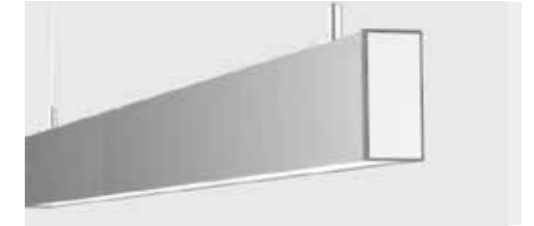

Luminaire Parameters			
Size	L1210*W40*H74mm	L1810*W40*H74mm	L2410*W40*H74mm
Cover	UGR Filter Diffuser	UGR Filter Diffuser	UGR Filter Diffuser
Cover material	PC	PC	PC
Lumens	1600lm	2400lm	3200lm
Typ.power	18W	28W	36W
CCT	3000/4000K	3000/4000K	3000/4000K
CRI	>80	>80	>80
Beam angle	93°	93°	93°
Input voltage	100-277V AC 50/60Hz	100-277V AC 50/60Hz	100-277V AC 50/60Hz
Power factor	>0.9	>0.9	>0.9
Power Supply	Built-in Isolation	Built-in Isolation	Built-in Isolation
Dimming	0-10V		
Color	Sliver / White / Black		
Installation	Pendant / Surface mounted		
Warranty	5 Years		
Certification	UL		

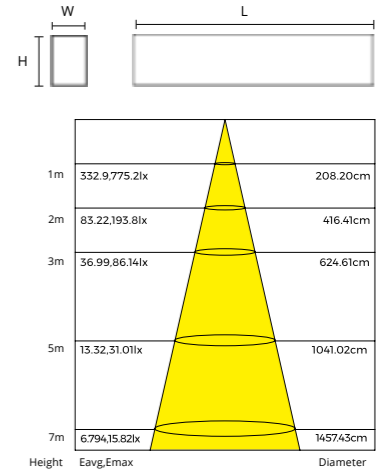

Multiple light distributions, select freely, flexible application.

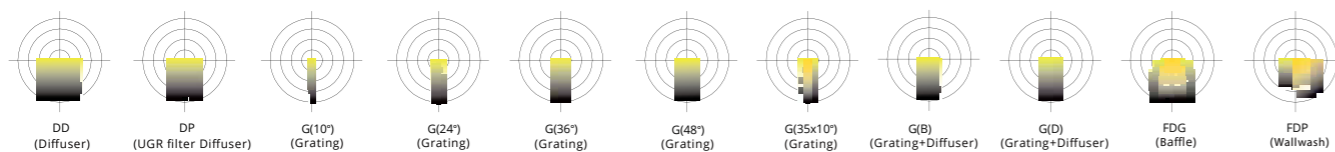

Model

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type
General Lighting System	Linear - GLS	35	Dual Color D	Prismatic P	Flat F	Silver S	Standard End Cap S	1200mm	Constant Current Rigid T	18W 18	3000K WW	>80 8	0-10V B
						White W	1800mm	28W 28		4000K NW			
						Black B	2400mm	36W 36					